



Printing Custom Labels

Setting the label information


1. Start ZebraDesigner
2. Click “Create a New Label”

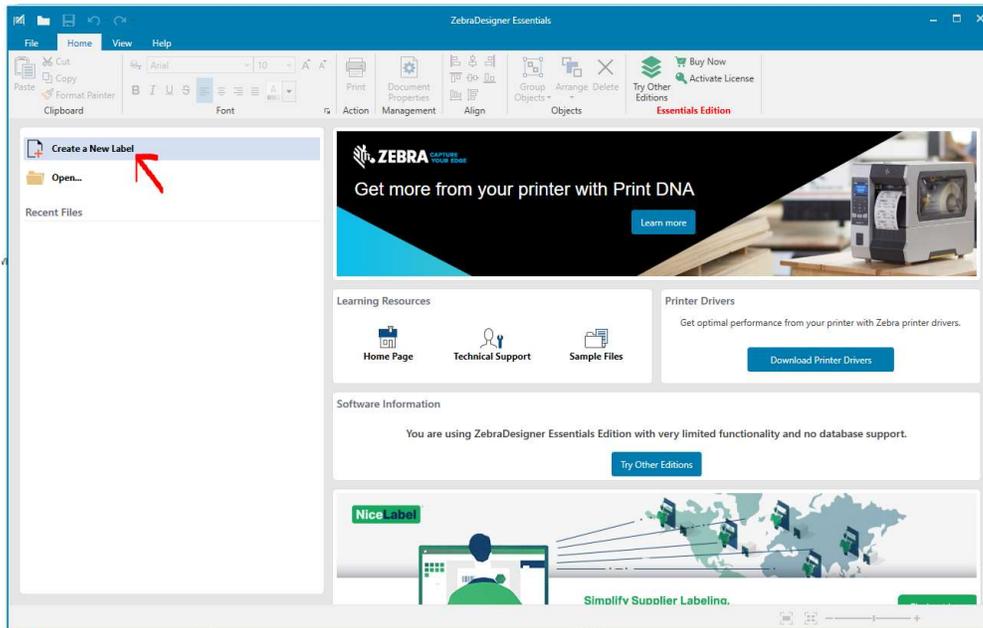


3. Your Zebra printer should already be selected, if not click the down arrow and select it. Click “Next”

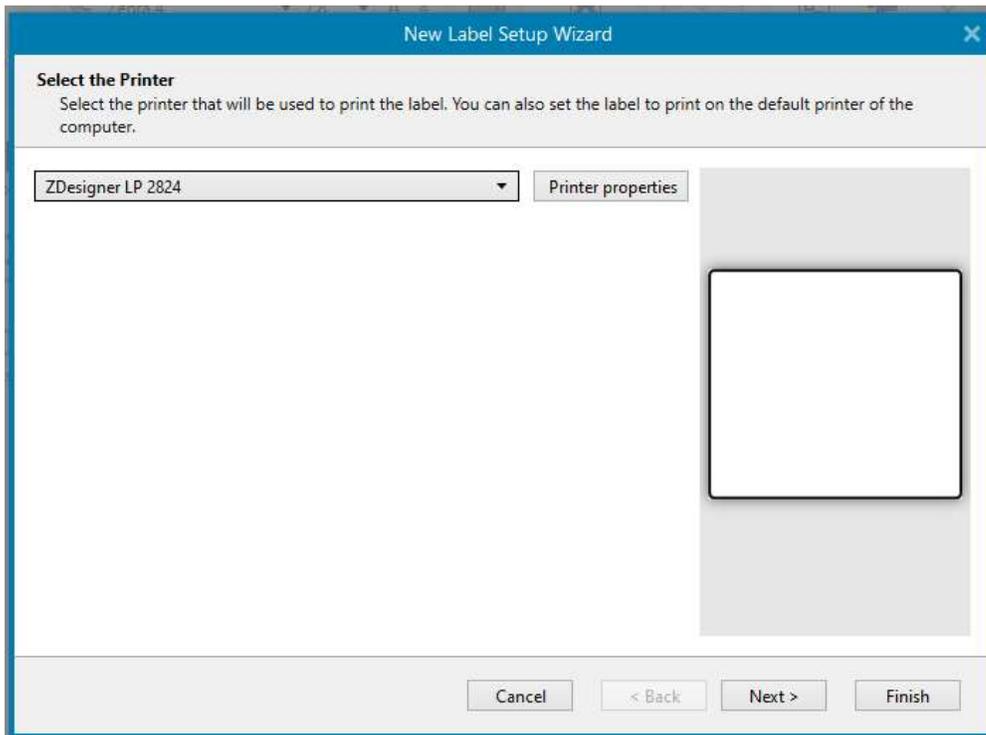

4. Select "Load settings from a predefined stock" and from the stock select POLYPRO 4000D -> 10015778, then click "Next"

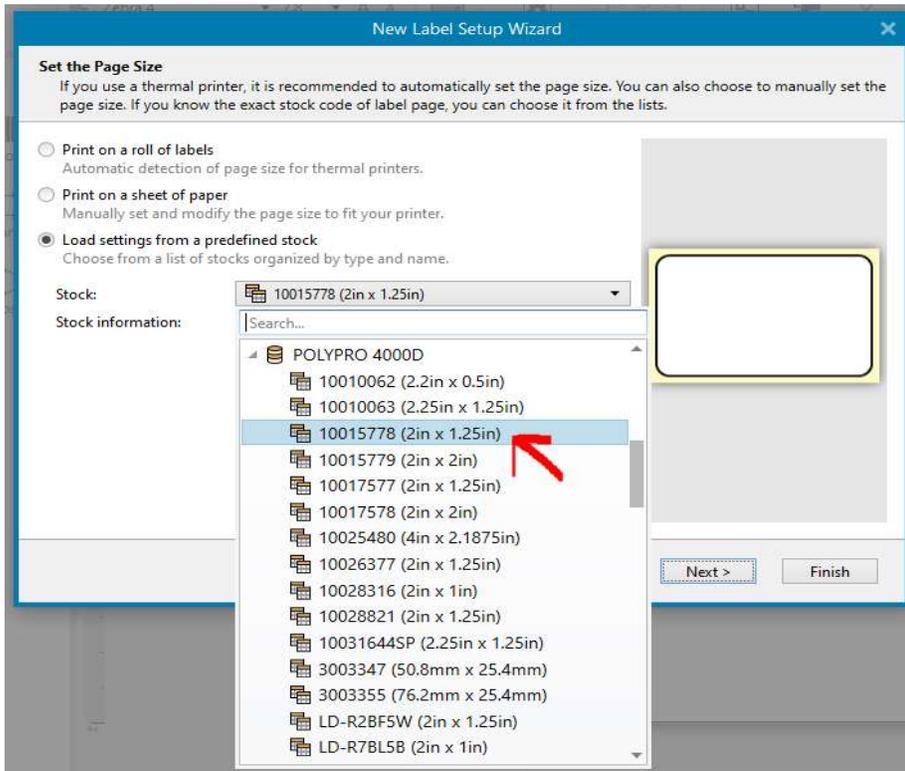

5. The next screen should look like this, just click "Next"

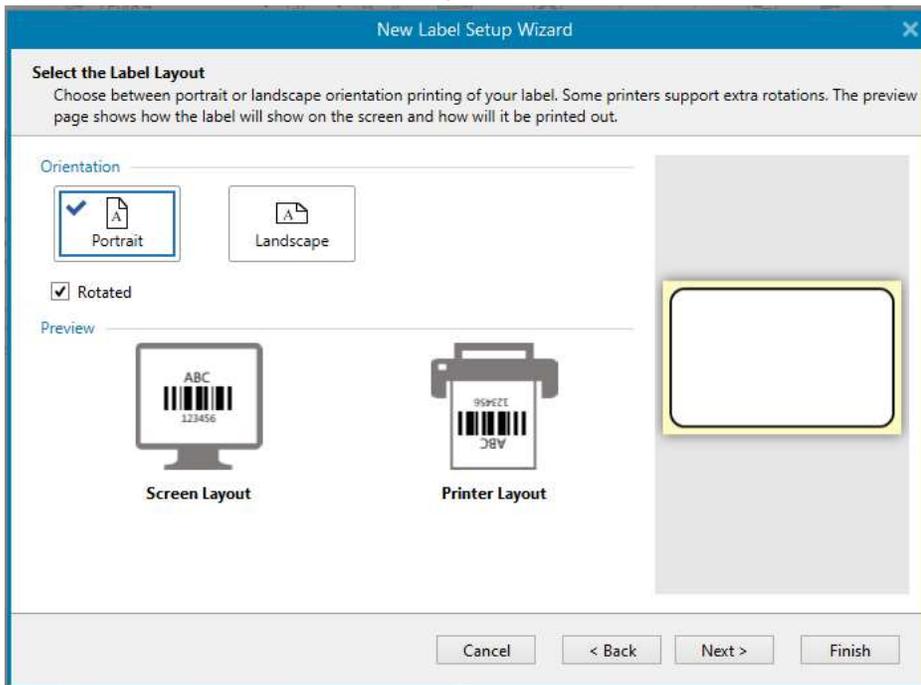

6. The next screen should look like this, just click “Next”

The screenshot shows the 'New Label Setup Wizard' dialog box, specifically the 'Specify the Label Dimensions' step. The title bar reads 'New Label Setup Wizard' with a close button (X) on the right. Below the title bar, the section is titled 'Specify the Label Dimensions' with a subtitle: 'These dimensions were automatically set based on your printer or stock selection. You can fine-tune these dimensions if they differ from the actual printed label.' The dialog is organized into several sections with adjustable fields:

- Unit of measure:** A dropdown menu set to 'in'.
- Label Dimensions:** 'Width' is 2.000 in and 'Height' is 1.250 in, both with up/down arrows.
- Margins:** 'Left' (0.063 in), 'Right' (0.062 in), 'Top' (0.063 in), and 'Bottom' (0.062 in) are all adjustable with up/down arrows.
- Labels Across:** 'Horizontal count' and 'Vertical count' are both set to 1. 'Horizontal gap' and 'Vertical gap' are both set to 0.000 in, adjustable with up/down arrows.
- Processing order:** A dropdown menu set to 'Horizontally - start at top left'.

On the right side of the dialog, there is a preview area showing a white rectangular label with a yellow border on a gray background. At the bottom of the dialog, there are four buttons: 'Cancel', '< Back', 'Next >', and 'Finish'. The 'Next >' button is highlighted with a dashed border.


7. Click “Finish”

The screenshot shows the 'New Label Setup Wizard' dialog box, specifically the 'Summary' step. The title bar reads 'New Label Setup Wizard' with a close button (X) on the right. Below the title bar, the section is titled 'Summary' with a subtitle: 'You have successfully configured your label. Review the settings and press the Finish button to create the label.' The dialog displays the following information:

- Printer:** ZDesigner LP 2824
- Label dimensions:** 2 in x 1.25 in
- Paper dimensions:** 2.125 in x 1.375 in


On the right side of the dialog, there is a preview area showing a white rectangular label with a yellow border on a gray background. At the bottom of the dialog, there are four buttons: 'Cancel', '< Back', 'Next >', and 'Finish'. A red arrow points to the 'Finish' button.

8. Your screen should look like this

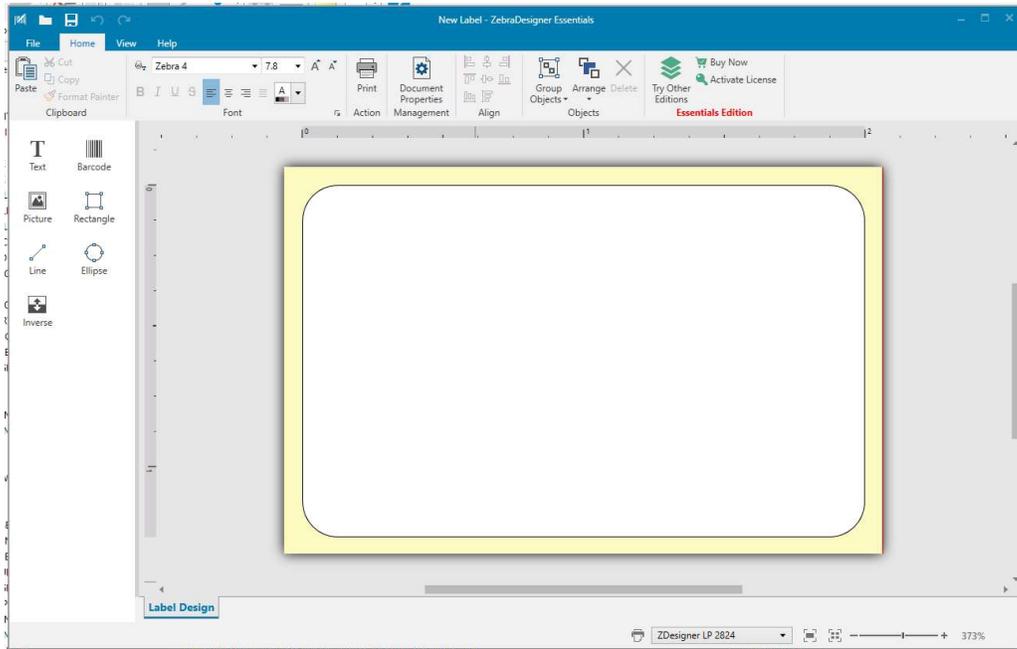


Creating and printing the label


1. Select the Text tool from the left-hand toolbar

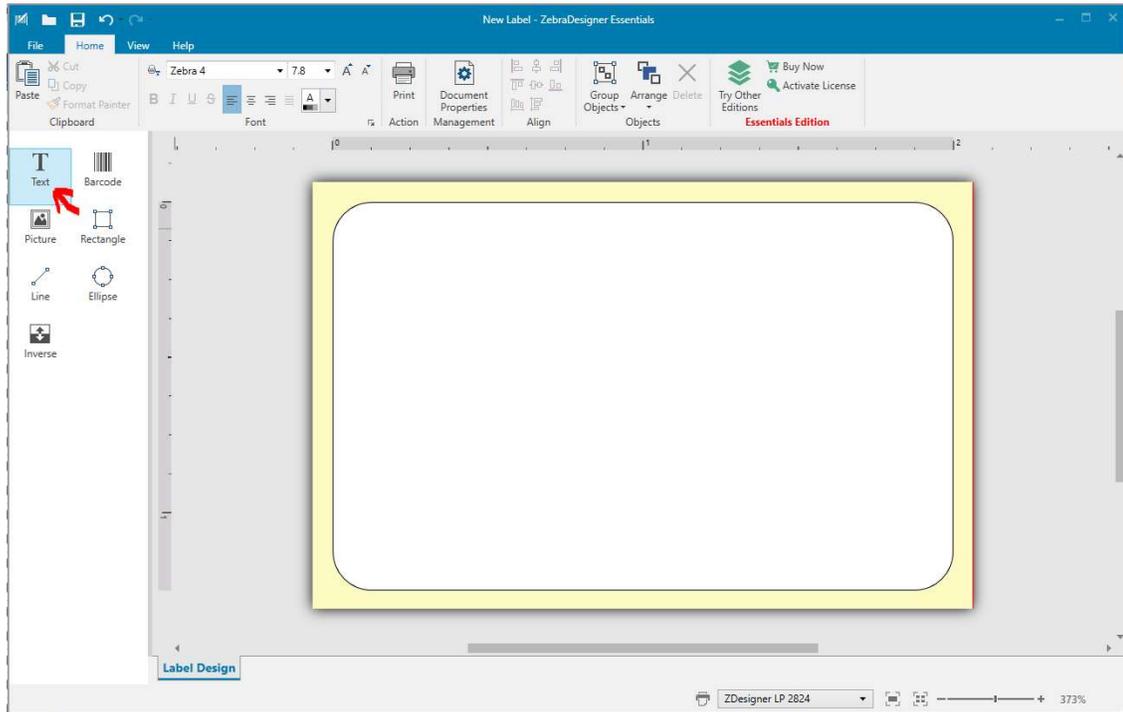


2. Click anywhere in the label area and a text box will appear

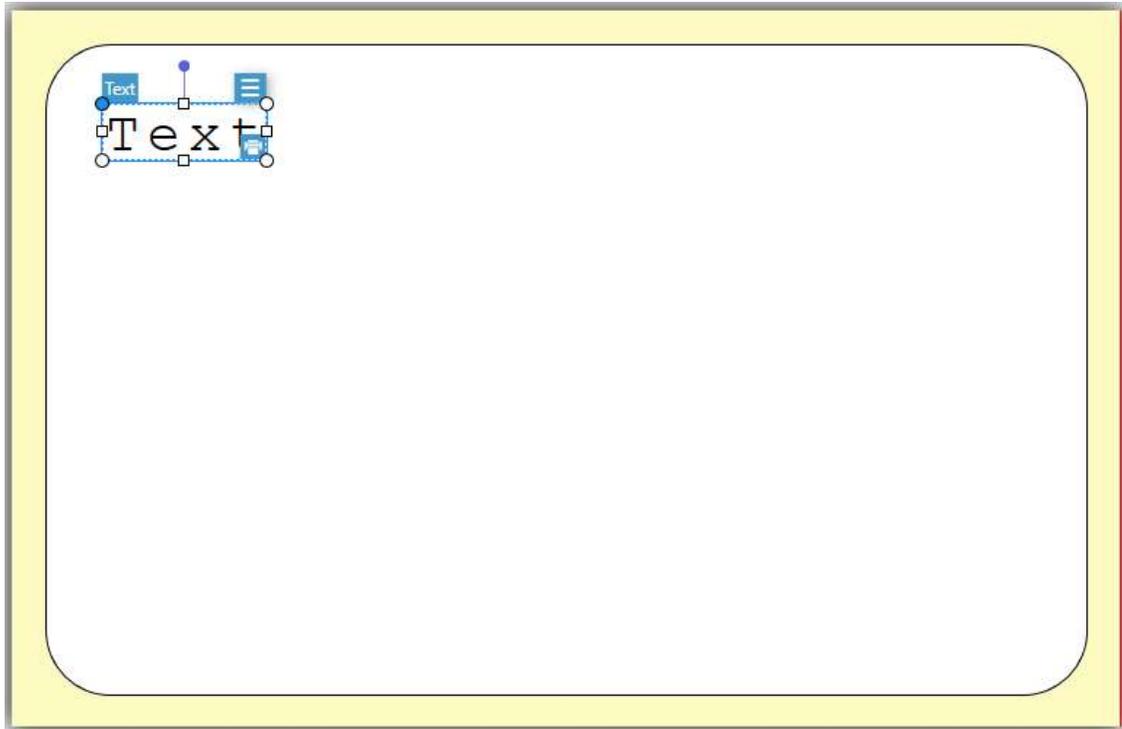


3. Right click the text and select Edit Text

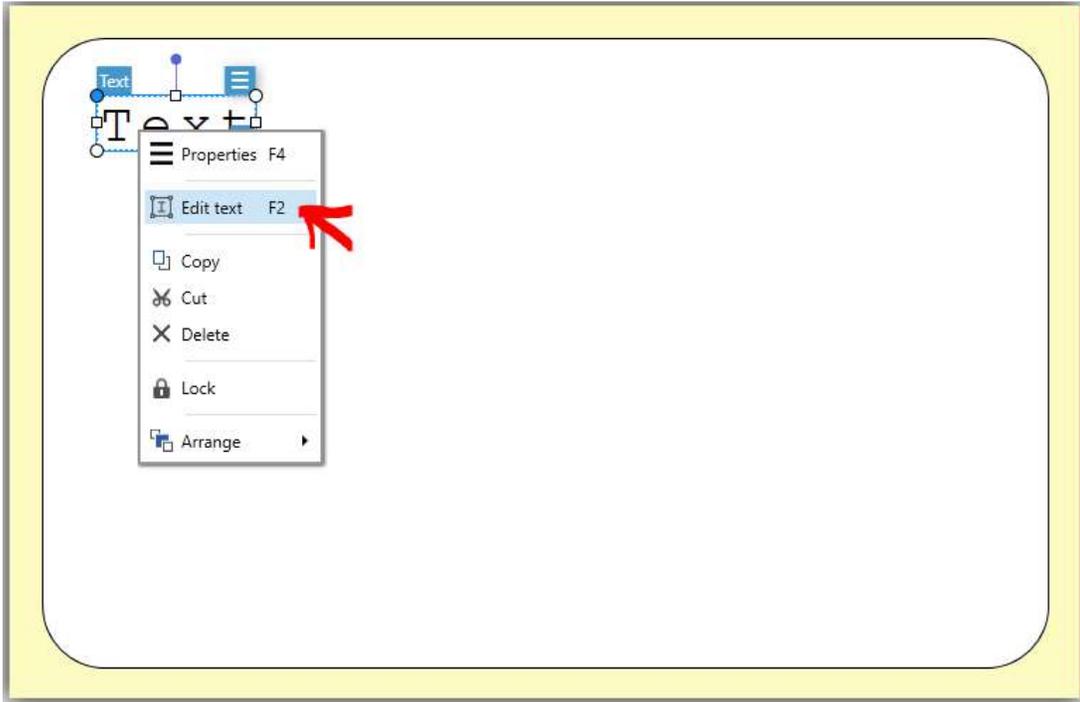


4. Delete the default text and enter your custom text. When you have finished entering your text, click anywhere outside the text box

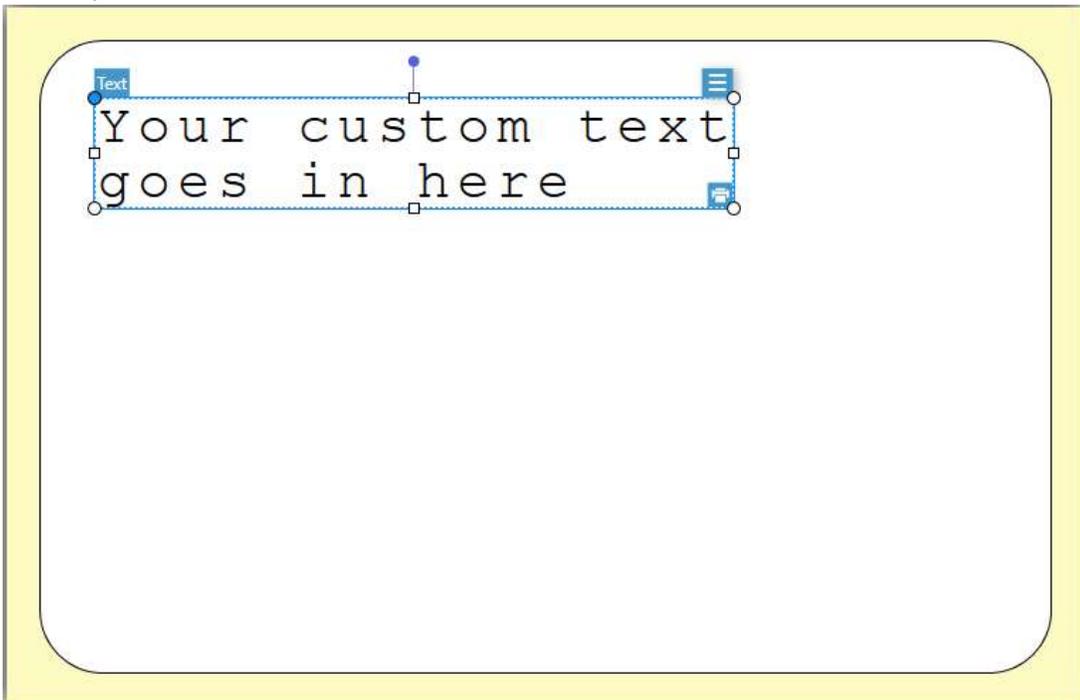


5. You can use multiple text boxes to create labels with different sized text

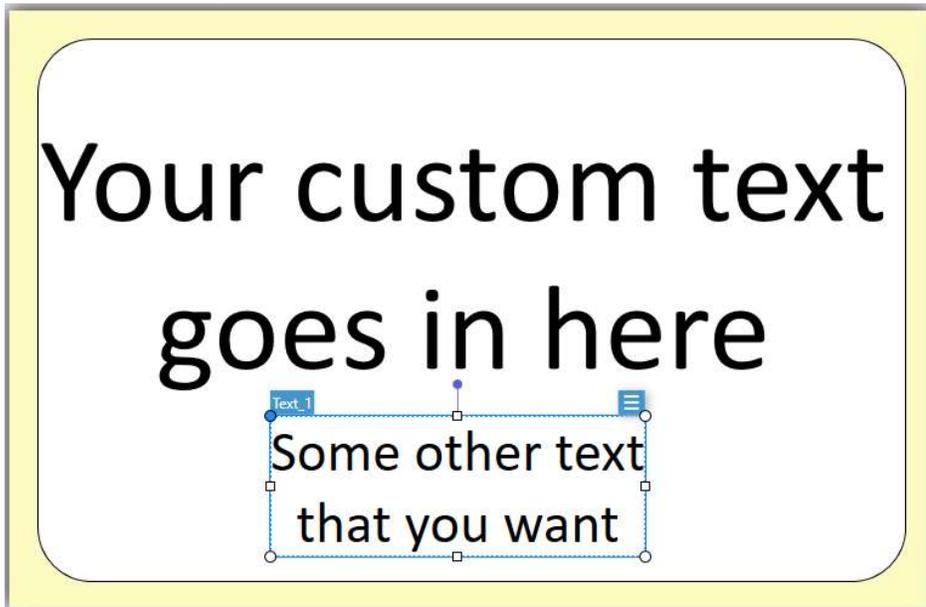

6. You can change the font, alignment, and size of your text using the toolbar at the top of the page

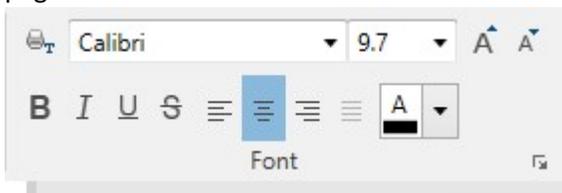


7. You can also change the size by dragging the dots and squares around the text box

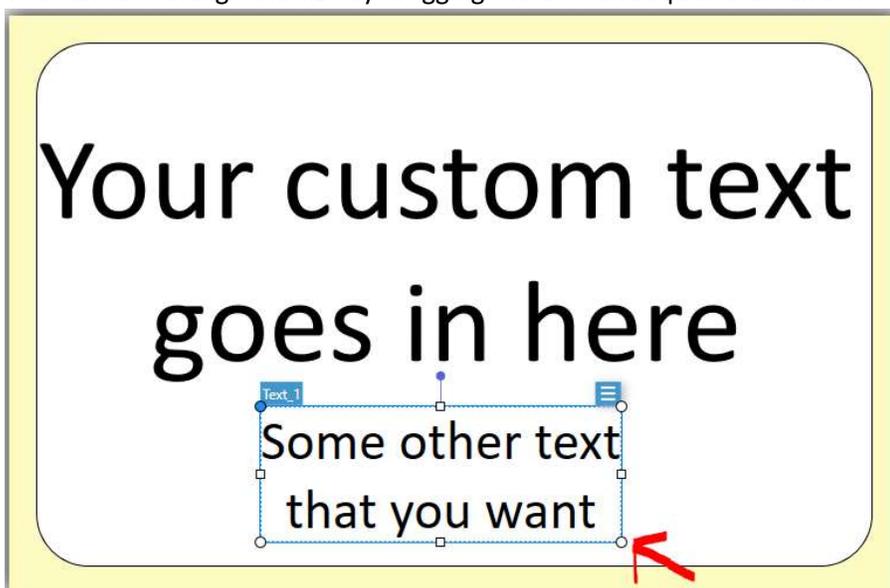

8. When you finish setting up your label, you can print it with the Print button in the top toolbox



9. A print window will display. Make sure the Zebra printer is selected and enter the number of labels you would like to print.

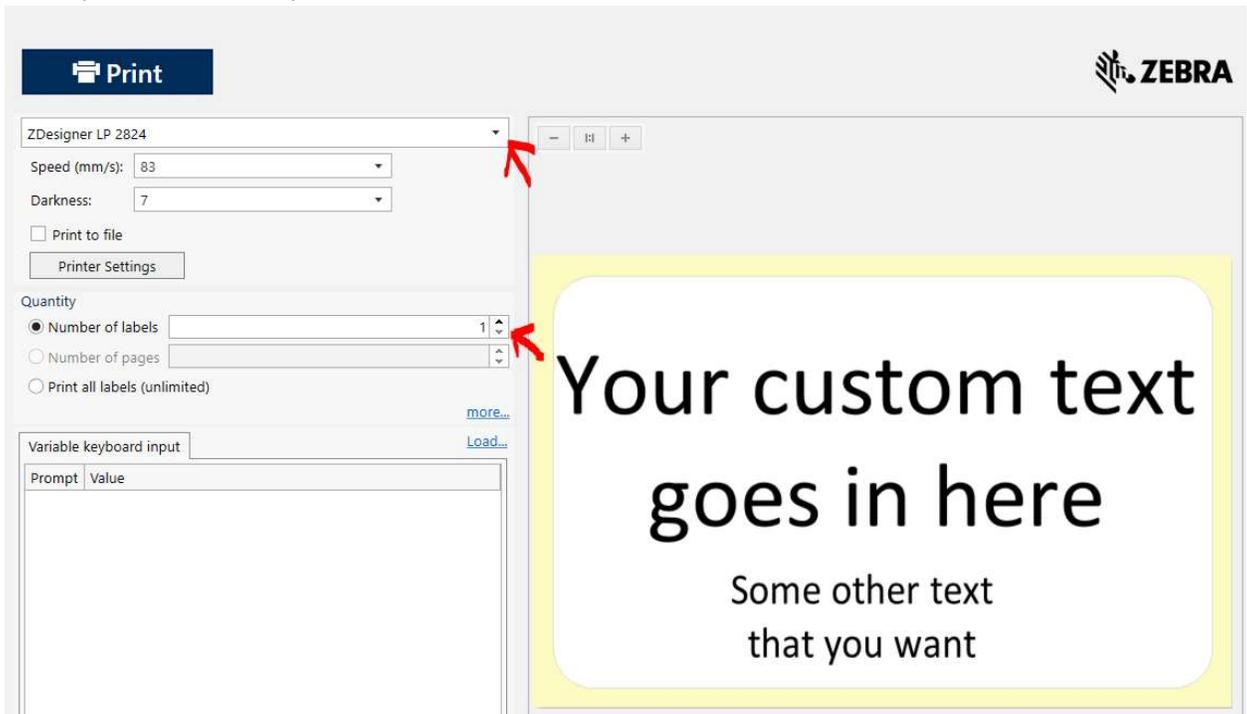

10. When you are done printing custom labels, you can exit the program. You may be asked to save your work, you should not.